


TORSO BALANCES

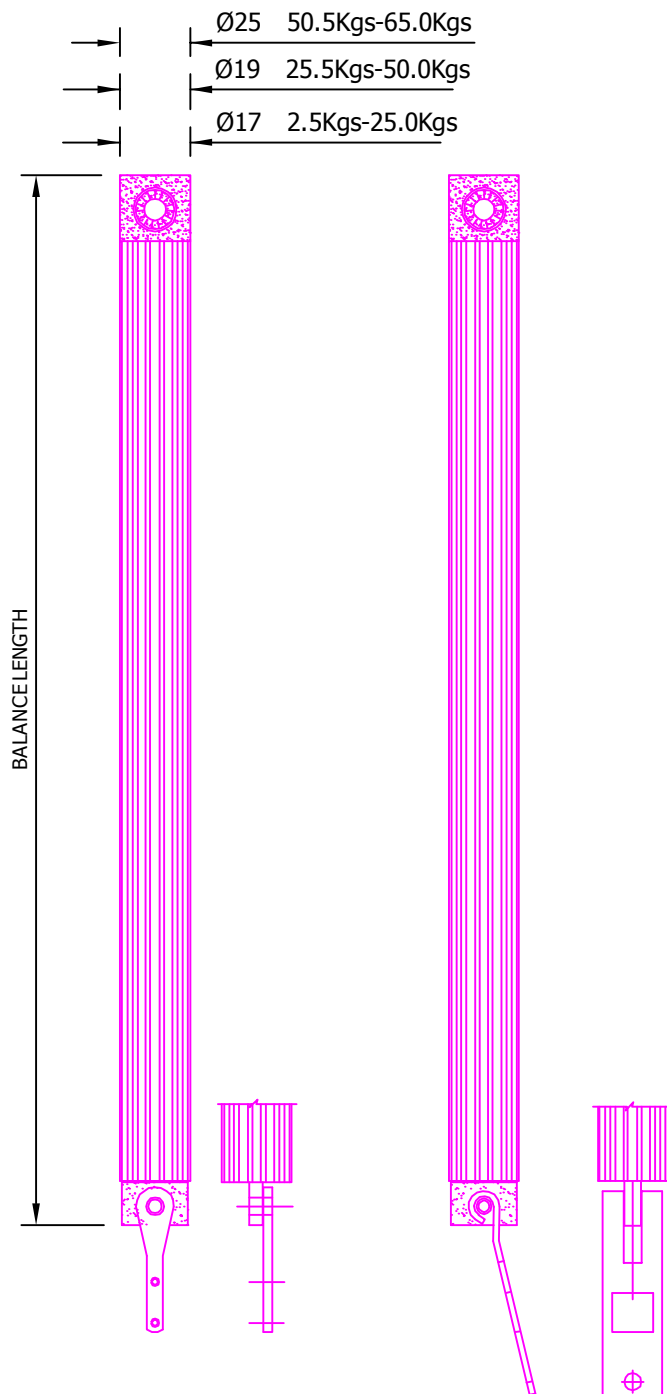

OPTION '1'
2 Pins for tilt in sash.
UK105 Torso link bracket.

OPTION '2'
For non-tilt sashes.
A range of brackets are available. (UK118 illustrated)
For further information please consult the Technical Dept.
to suit timber or specific system companies profile.

TORSO BALANCE

A pre-tensioned double sprung balance specified for its very high reliability and excellent track record. Provides torque-free lift for over 50,000 cycles. Available from 225mm to 1800mm in 25mm increments. 1525mm to 1800mm on extended lead times.

BALANCE EXTENSION

Ø17 & Ø19 = 2 x Balance length - 100mm
Ø25 = 2 x Balance length - 150mm
(From the top of the balance to the end of the end moulding to which the bracket is attached).

STANDARD SASH WEIGHT CAPACITY

4kgs - 40kgs

NON-STANDARD SASH WEIGHT CAPACITY

2.5Kgs - 3.5Kgs & 40.5Kgs - 65.0Kgs
Prices on application.

PLEASE NOTE:

Specials from 50.5kgs - 65kgs can be supplied. (Tube diameter 25mm on extended lead times). Consultation with Technical Dept. is essential before placing orders.

MATERIALS

Outer tube: Rigid PVC-U
End Moulding: Reinforced nylon
Brackets: Stainless steel or corrosion resistant carbon steel.

COLOURS

Outer tubes available in grey, brown or white tubes. (grey only for Ø 25mm balances)

All of the information shown on this data sheet was correct at the time of issue. All information however is subject to change and therefore it is advisable to check with Caldwell Hardware to ensure that you have the latest issue level.